



IEC2016対応

日付	
仕様書番号	TJP231215NEG9RC.27
管理番号	

納入仕様書

御中

品名： 太陽電池モジュール

型式： TSM-NEG9RC.27

トリナ・ソーラー・ジャパン株式会社

注記： 製品使用前に、ユーザーマニュアル及び限定保証書をお読みください。

本仕様書記載事項は予告なく変更されることがあります。

改定履歴

改定番号	日付	改定内容
1	2022/10/17	新規作成
2	2023/1/23	TUV認証書追加・TSM_JP_2023_PA5に準じ電気特性更新
3	2023/4/20	認証書追加、TSM_JP_2023_A
4	2023/5/16	最大出力、フレーム断面、固定穴位置、質量仕様変更、TSM_JP_2023_B
5	2023/7/12	5.3.2 項に絶縁抵抗値追記、DATASHEET更新 TSM_JP_2023_B
6	2023/9/11	認証書Rev46更新、マンセル近似値追記
7	2023/12/8	公称温度係数Pmax更新 (-0.30⇒-0.29) TSM_JP_2023_D
8	2023/12/15	445W 追加、一部電気特性更新 TSM_JP_2023_D

トリナソーラー結晶系太陽電池モジュール

1. 適用範囲

本仕様書は、トリナソーラー社製太陽電池モジュール（以下「本モジュール」）に適用する

2. 適用規格

本モジュールは 以下の国際規格に関し、第三者機関による認証を取得済みである。

IEC 61215-1:2016	性能認証規格（試験要求）
IEC 61215-1-1:2016	性能認証規格（結晶系シリコン太陽光モジュール試験の特別要求）
IEC 61215-2:2016	性能認証規格（試験手順）
IEC 61730-1:2016	安全認証規格（構造に対する要求事項）
IEC 61730-2:2016	安全認証規格（試験に対する要求事項）

3. 感電保護クラス及び火災等級

感電保護クラス	本モジュールはIEC61730-1 4.3項に規定される等級Ⅱに適合する
火災等級	本モジュールはUL790に規定される火災等級A に適合する

4. モジュール最大定格

項目	単位	最大定格値	備考
動作温度	℃	-40～+85	
保管温度	℃	-40～+50	※1
動作湿度	%RH	85	※2
正圧試験荷重	Pa	5400	※3、※4、※5
負圧試験荷重	Pa	4000	※3、※4、※5
最大システム電圧	VDC	1500	
最大過電流保護定格	A	20	

※1：ユーザーマニュアルにて定めた保管方法の場合に限る。

※2：雨天時等の一時的な逸脱は、許容する。

※3：ユーザーマニュアルにて定めた取付方法の場合に限る。

※4：IEC61215:2016の機械的荷重試験に準じた方法で、該当する荷重条件にて外観及び電気的性能に異常が無いこととする。

※5：設計荷重の安全係数は、1.5とする。設計荷重は試験荷重の1/1.5。

5. 仕様

5.1 基幹部材

本モジュールに使用する材料は、下記内容と規定し、特に規定がないものについてはこの仕様書の性能を十分に満たす材料を選定し使用するものとする

部材仕様

セル	単結晶 マンセル近似値 7.5PB/2/0.5
セル枚数	144セル (6×24)
外形寸法	1762±2 × 1134±2 × 30±1 mm
質量	21.0 kg
フロントガラス	高透過・反射防止膜付熱強化ガラス 1.6 mm
封止材料	POE/EVA 透明
バックガラス	熱強化ガラス 1.6 mm
フレーム	ブラック・アルマイト処理アルミ合金 30mm マンセル近似値 N1
端子ボックス	IP68定格
ケーブル	PVケーブル4.0mm ² 縦置き：N 280±10 mm, P 350±10 mm 横置き：N 1100±10 mm, P 1100±10 mm
コネクタ	MC4 EVO2 / EVO2A / TS4 Plus / TS4*(1500V)

*: トリナコネクタ (ケーブル外径6.0-7.2mm用、
1パレットに専用スバナと2組の予備コネクタ付属)

5.2 出力特性

モジュールの出力特性は、標準試験条件 (STC) で測定したものとする
(モジュール温度25℃、AM1.5、放射照度：1000w/m²)

TSM-415NEG9RC.27

型 式	TSM-415NEG9RC.27
公称最大出力(Pmax)	415W
公称最大動作電圧(Vmax)	42.1V
公称最大動作電流(Impp)	9.86A
公称開放電圧(Voc)	50.1V
公称短絡電流(Isc)	10.50A
モジュール変換効率	20.8%

TSM-420NEG9RC.27

型 式	TSM-420NEG9RC.27
公称最大出力(Pmax)	420W
公称最大動作電圧(Vmax)	42.5V
公称最大動作電流(Impp)	9.89A
公称開放電圧(Voc)	50.5V
公称短絡電流(Isc)	10.53A
モジュール変換効率	21.0%

TSM-425NEG9RC.27

型 式	TSM-425NEG9RC.27
公称最大出力(Pmax)	425W
公称最大動作電圧(Vmax)	42.9V
公称最大動作電流(Impp)	9.92A
公称開放電圧(Voc)	50.9V
公称短絡電流(Isc)	10.56A
モジュール変換効率	21.3%

TSM-430NEG9RC.27

型 式	TSM-430NEG9RC.27
公称最大出力(Pmax)	430W
公称最大動作電圧(Vmax)	43.2V
公称最大動作電流(Impp)	9.96A
公称開放電圧(Voc)	51.4V
公称短絡電流(Isc)	10.59A
モジュール変換効率	21.5%

TSM-435NEG9RC.27

型 式	TSM-435NEG9RC.27
公称最大出力(Pmax)	435W
公称最大動作電圧(Vmax)	43.6V
公称最大動作電流(Impp)	9.99A
公称開放電圧(Voc)	51.8V
公称短絡電流(Isc)	10.64A
モジュール変換効率	21.8%

TSM-440NEG9RC.27

型 式	TSM-440NEG9RC.27
公称最大出力(Pmax)	440W
公称最大動作電圧(Vmax)	44.0V
公称最大動作電流(Impp)	10.01A
公称開放電圧(Voc)	52.2V
公称短絡電流(Isc)	10.67A
モジュール変換効率	22.0%

TSM-445NEG9RC.27

型 式	TSM-445NEG9RC.27
公称最大出力(Pmax)	445W
公称最大動作電圧(Vmax)	44.3V
公称最大動作電流(Impp)	10.05A
公称開放電圧(Voc)	52.6V
公称短絡電流(Isc)	10.71A
モジュール変換効率	22.3%

公称温度係数 (%/℃)	最大出力(Pmax)	-0.29
	開放電圧(Voc)	-0.24
	短絡電流(Isc)	0.04

公称出力許容公差	上限値	下限値	単位
	3	公称値	%

5.3 出荷検査

出荷検査は、電気特性検査、絶縁耐圧試験、及び外観検査を全数行い、良品のみを出荷する

5.3.1 電気特性検査

ソーラーシミュレーターで、STC条件で、電気特性測定を行う

STC条件は、AM1.5、放射照度 1000 W/m^2 、 $25^\circ\text{C} \pm 2^\circ\text{C}$

5.3.2 絶縁性能

耐電圧：（システム電圧 $\times 2 + 1000\text{V}$ ）の直流電圧を1 分間印加後、
絶縁破壊などの異常がないこと*1

*1 JIS C 61215-2 にて出荷検査における耐電圧試験条件の印加電圧を
（システム電圧 $\times 2 + 1000\text{V}$ ） $\times 1.2$ にすることにより、保持時間を1
秒以上に短縮することが認められています。

絶縁抵抗：DC1500Vを印可し絶縁抵抗値 $40\text{M}\Omega \cdot \text{m}^2$ 以上

5.3.3 外観検査

社内規定に準じて、全数検査を行う

5.3.4 フラッシュレポート

シリアルナンバーと電気特性結果の対比ができるレポートを提出する

5.4 梱包構成


集合梱包 36枚/パレット

936枚/40FTコンテナ

6. 設置上の注意

別途、ユーザーマニュアル参照

7. 各部寸法（モジュール寸法：1762±2 × 1134±2 × 30±1 mm）

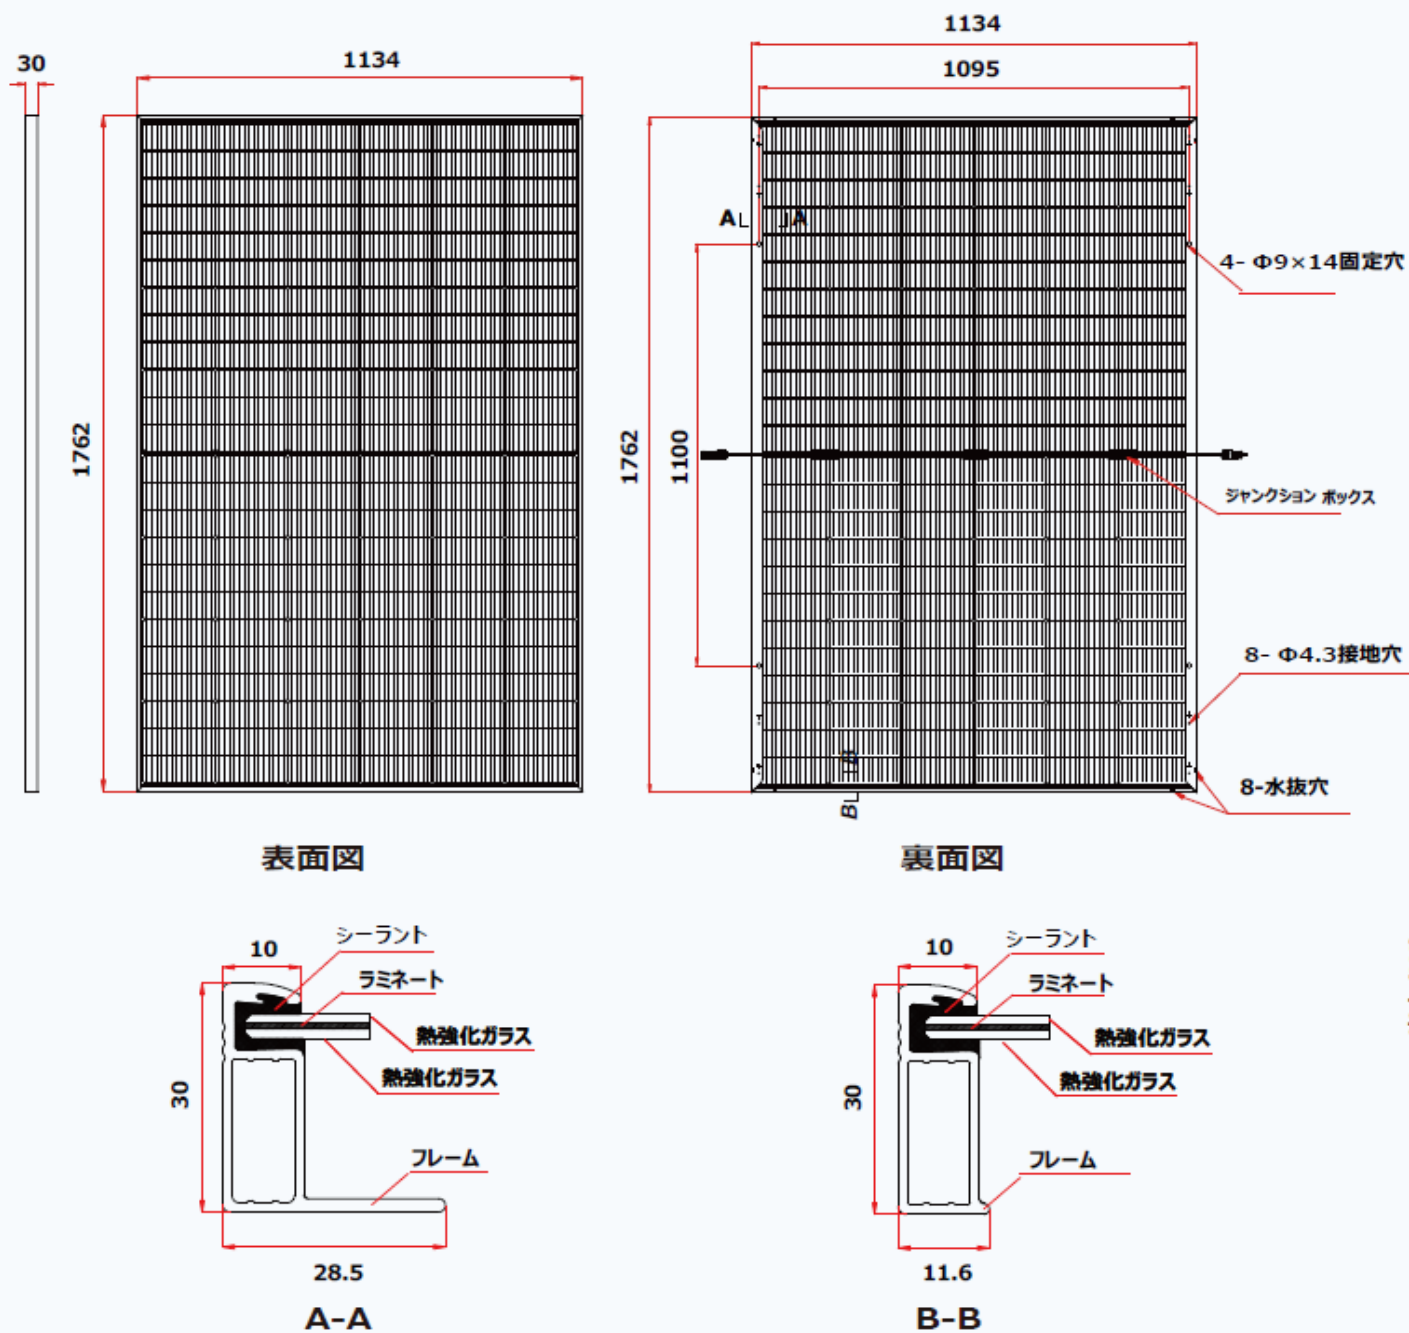

注) 形状は、予告なく変更する場合があります。

8. 製品ラベル

TSM-415NEG9RC.27

	Maximum Power(P _{max})	415W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	42.1V		
Maximum Power Current(I _{mp})	9.86A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	50.1V *			
Short Circuit Current(I _{sc})	10.5A *			
Maximum Series Fuse	20A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

TSM-420NEG9RC.27

	Maximum Power(P _{max})	420W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	42.5V		
Maximum Power Current(I _{mp})	9.89A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	50.5V *			
Short Circuit Current(I _{sc})	10.53A *			
Maximum Series Fuse	20A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

TSM-425NEG9RC.27

	Maximum Power(P _{max})	425W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	42.6V		
Maximum Power Current(I _{mp})	9.92A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	50.9V *			
Short Circuit Current(I _{sc})	10.56A *			
Maximum Series Fuse	20A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

TSM-430NEG9RC.27

	Maximum Power(P _{max})	430W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	43.2V		
Maximum Power Current(I _{mp})	9.96A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	51.4V *			
Short Circuit Current(I _{sc})	10.59A *			
Maximum Series Fuse	25A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

TSM-435NEG9RC.27

	Maximum Power(P _{max})	435W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	43.6V		
Maximum Power Current(I _{mp})	9.99A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	51.8V *			
Short Circuit Current(I _{sc})	10.64A *			
Maximum Series Fuse	20A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

TSM-440NEG9RC.27

	Maximum Power(P _{max})	440W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	44.0V		
Maximum Power Current(I _{mp})	10.01A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	52.2V *			
Short Circuit Current(I _{sc})	10.67A *			
Maximum Series Fuse	20A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

TSM-445NEG9RC.27

	Maximum Power(P _{max})	445W *	*(Considering LID, the power range of the certification authority, tolerance (P_{max}) ±3%, (V_{oc}) ±3%, (I_{sc}) ±5%) For field connections, use minimum 4mm² (No. 12AWG) copper wires insulated for a minimum 90°C WARNING-ELECTRICAL HAZARD This module produces electricity when exposed to light. Follow all applicable electrical safety precautions. Trina Solar Co., Ltd. No.2 TianHe Road, Trina PV Industrial Park, New District, Changzhou City, Jiangsu Province 213031, P. R. China www.trinasolar.com	  
	Maximum Power Voltage(V _{mp})	44.3V		
Maximum Power Current(I _{mp})	10.05A		EU-28 WEEE COMPLIANT	
Open Circuit Voltage(V _{oc})	52.6V *			
Short Circuit Current(I _{sc})	10.71A *			
Maximum Series Fuse	25A			
Power Selection	0 ~ 5W			
Maximum System Voltage	1500V			
Electrical Rating At STC: AM 1.5 1000W/m ² Tc=25°C				

Made in China

9. 変換効率

【単セル面積】

辺1 a 182 mm
 辺2 b 70 mm
 $182 \text{ mm} \times 70 \text{ mm} = 12740 \text{ mm}^2$
 (0.01274 m^2)

モジュール：6並列(a) * 24直列(b) 計144セル

【全セル面積/モジュール】

$144 \text{ セル} \times 0.01274 \text{ m}^2 = 1.83456 \text{ m}^2$

【モジュール面積】



$1762 \text{ mm} \times 1134 \text{ mm} = 1.998108 \text{ m}^2$

1. セル実効変換効率

セル全面積 1.83456 m^2
 計算式 (変換効率) $415/1834(22.62\%)$
 $420/1834(22.89\%)$
 $425/1834(23.16\%)$
 $430/1834(23.43\%)$
 $435/1834(23.71\%)$
 $440/1834(23.99\%)$
 $445/1834(24.25\%)$

2. モジュール変換効率

モジュール面積 1.998108 m^2
 計算式 (変換効率) $415/1998.10(20.8\%)$
 $420/1998.10(21.0\%)$
 $425/1998.10(21.3\%)$
 $430/1998.10(21.5\%)$
 $435/1998.10(21.8\%)$
 $440/1998.10(22.0\%)$
 $445/1998.10(22.3\%)$

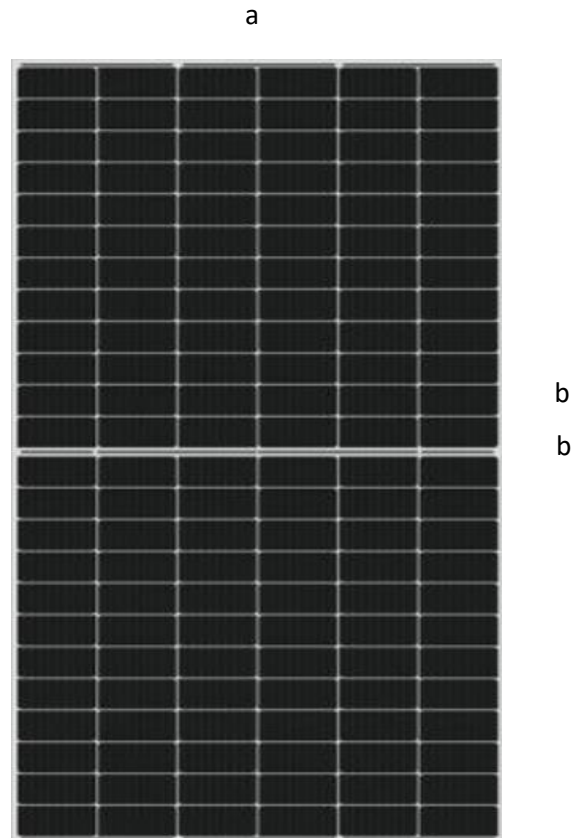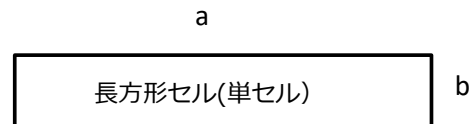

製品型式	変換効率種類	出力	少数第二位切捨て
TSM-415NEG9RC.27	セル実効変換効率	415W	22.6%
TSM-420NEG9RC.27		420W	22.8%
TSM-425NEG9RC.27		425W	23.1%
TSM-430NEG9RC.27		430W	23.4%
TSM-435NEG9RC.27		435W	23.7%
TSM-440NEG9RC.27		440W	23.9%
TSM-445NEG9RC.27		445W	24.2%



Product Service

CERTIFICATE

No. Z2 070321 0097 Rev. 46

Holder of Certificate: **Trina Solar Co., Ltd.**
No. 2 TianHe Road, Trina PV Industrial Park
New District
213031 Changzhou City, Jiangsu Province
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

Product: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono & Poly Crystalline Silicon Photovoltaic (PV) Module(s)

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 64290170581761

Valid until: 2024-03-30

Date, 2023-07-28

(David Bo)



Product Service

CERTIFICATE

No. Z2 070321 0097 Rev. 46

TSM-xxxNEG7M.25(II), TSM-xxxNEG7M.07(II),
TSM-xxxNEG7M.20(II), TSM-xxxNEG7MC.27(II),
TSM-xxxNEG7M.28(II), TSM-xxxNEG7M.29(II)
(xxx=325-360, in steps of 5).

mono series with 161.7 x 80.85 (mm) half cutting N type MBB bifacial cell:

144 cells:

TSM-xxxNEG16MC(II), TSM-xxxNEG16MC.05(II),
TSM-xxxNEG16MC.25(II), TSM-xxxNEG16MC.07(II),
TSM-xxxNEG16MC.20(II), TSM-xxxNEG16MC.27(II),
TSM-xxxNEG16MC.28(II), TSM-xxxNEG16MC.29(II)
(xxx=390-415, in steps of 5).

120 cells:

TSM-xxxNEG7MC(II), TSM-xxxNEG7MC.05(II),
TSM-xxxNEG7MC.25(II), TSM-xxxNEG7MC.07(II),
TSM-xxxNEG7MC.20(II), TSM-xxxNEG7MC.27(II),
TSM-xxxNEG7MC.28(II), TSM-xxxNEG7MC.29(II)
(xxx=325-345, in steps of 5).

mono series with 210.0 x 70.0 (mm) N type 1/3 cutting MBB bifacial cell:

150 cells:

TSM-xxxNEG18MC.20(II), TSM-xxxNEG18MC.25(II),
TSM-xxxNEG18MC.27(II), TSM-xxxNEG18MC.28(II),
TSM-xxxNEG18MC.29(II), TSM-xxxNEG18MC.30(II)
(xxx=500-520, in steps of 5).

120 cells:

TSM-xxxNEG9C.20, TSM-xxxNEG9C.25,
TSM-xxxNEG9C.27, TSM-xxxNEG9C.28,
TSM-xxxNEG9C.29
(xxx=390-430, in steps of 5).

mono series with 210.0 x 70.0 (mm) N type 1/3 cutting MBB bifacial cell:

(Module Type for rear side with white EVA or Glass white)

120 cells:

TSM-xxxNEG9.20, TSM-xxxNEG9.25,
TSM-xxxNEG9.27, TSM-xxxNEG9.28,
TSM-xxxNEG9.29
(xxx=390-430, in steps of 5).

mono series with 210.0 x 105.0 (mm) half cutting N type MBB bifacial cell:

120 cells:

TSM-xxxNEG20C.20, TSM-xxxNEG20C.25,
TSM-xxxNEG20C.27, TSM-xxxNEG20C.28,
TSM-xxxNEG20C.29 (xxx=580-645, in steps of 5).

110 cells:

TSM-xxxNEG19C.20, TSM-xxxNEG19C.25,
TSM-xxxNEG19C.27, TSM-xxxNEG19C.28,
TSM-xxxNEG19C.29 (xxx=530-570, in steps of 5).

132 cells:

TSM-xxxNEG21C.20, TSM-xxxNEG21C.25,
TSM-xxxNEG21C.27, TSM-xxxNEG21C.28,
TSM-xxxNEG21C.29 (xxx=635-710, in steps of 5).

mono series with 182.0 x 70.0 (mm) N type 1/3 cutting MBB bifacial cell:

144 cells:

TSM-xxxNEG9RC.20, TSM-xxxNEG9RC.25,
TSM-xxxNEG9RC.28, TSM-xxxNEG9RC.27,



Product Service

CERTIFICATE

No. Z2 070321 0097 Rev. 46

TSM-xxxNEG9RC.29, TSM-xxxNEG9RC.B0,
TSM-xxxNEG9RC.B5, TSM-xxxNEG9RC.B8,
TSM-xxxNEG9RC.B7, TSM-xxxNEG9RC.B9,
(xxx=375-460, in steps of 5).

mono series with 182.0 x 70.0 (mm) N type 1/3 cutting MBB bifacial cell:

(Module Type for rear side with white EVA or Glass white)

144 cells:

TSM-xxxNEG9R.20, TSM-xxxNEG9R.25,
TSM-xxxNEG9R.28, TSM-xxxNEG9R.27,
TSM-xxxNEG9R.29, TSM-xxxNEG9R.B0,
TSM-xxxNEG9R.B5, TSM-xxxNEG9R.B8,
TSM-xxxNEG9R.B7, TSM-xxxNEG9R.B9,
(xxx=375-460, in steps of 5).

mono series with 182.0 x 105.0 (mm) half cutting N type MBB bifacial cell:

132 cells:

TSM-xxxNEG19RC.20, TSM-xxxNEG19RC.25,
TSM-xxxNEG19RC.27, TSM-xxxNEG19RC.28,
TSM-xxxNEG19RC.29, (xxx=525-620, in steps of 5).

mono series with 182.0 x 105.0 (mm) half cutting N type MBB bifacial cell:

(Module Type for rear side with white EVA or Glass white)

132 cells:

TSM-xxxNEG19R.20, TSM-xxxNEG19R.25,
TSM-xxxNEG19R.27, TSM-xxxNEG19R.28,
TSM-xxxNEG19R.29, (xxx=525-620, in steps of 5).

mono series with 182.0 x 91.0 (mm) half cutting N type MBB bifacial cell:

144 cells:

TSM-xxxNEG18C.20, TSM-xxxNEG18C.25,
TSM-xxxNEG18C.27, TSM-xxxNEG18C.28,
TSM-xxxNEG18C.29, (xxx=555-590, in steps of 5)

mono series with 158.75 x 79.375 (mm) half cutting N type MBB bifacial cell (for cells splicing technology):

156 cells:

TSM-xxxNEG15XC.(II), TSM-xxxNEG15XC.05(II),
TSM-xxxNEG15XC.25(II), TSM-xxxNEG15XC.07(II),
TSM-xxxNEG15XC.20(II), TSM-xxxNEG15XC.27(II),
TSM-xxxNEG15XC.28(II), TSM-xxxNEG15XC.29(II)
(xxx=425-445, in steps of 5).

mono series with 158.75 x 79.375 (mm) half cutting MBB bifacial HJT cell:

(Horizontal version: the long side of the cell is parallel to the long side of the module)

156 cells:

TSM-xxxHEG15XKC.203, TSM-xxxHEG15XKC.253,
TSM-xxxHEG15XKC.273, TSM-xxxHEG15XKC.283,
TSM-xxxHEG15XKC.293 (xxx=435-455, in steps of 5).

182 cells:

TSM-xxxHEG15YKC.20, TSM-xxxHEG15YKC.25,
TSM-xxxHEG15YKC.27, TSM-xxxHEG15YKC.28,
TSM-xxxHEG15YKC.29 (xxx=515-530, in steps of 5).

168 cells:

TSM-xxxHEG15VKC.20, TSM-xxxHEG15VKC.25,
TSM-xxxHEG15VKC.27, TSM-xxxHEG15VKC.28,



Product Service

CERTIFICATE

No. Z2 070321 0097 Rev. 46

Parameters:

Construction:	Framed and Frameless with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class A or Class C according to UL 790
Test Laboratory:	Yangzhou Opto-Electrical Products Testing Institute, No. 10 West Kaifa Road, Yangzhou, 225009 Jiangsu, P. R. China.

Tested according to:

IEC 61215-1:2016
EN 61215-1:2016
IEC 61215-1-1:2016
EN 61215-1-1:2016
IEC 61215-2:2016
EN 61215-2:2017
IEC 61730-1:2016
EN IEC 61730-1:2018
IEC 61730-2:2016
EN IEC 61730-2:2018
EN IEC 61730-1:2018/AC:2018-06
EN IEC 61730-2:2018/AC:2018-06